


FRONT VIEW


SILT FENCE FABRIC SPECIFICATIONS	
POLYMERIC MESH AOS (ASTM D4751)	0.60 MM MAXIMUM FOR SLIT WOVENS (#30 SIEVE). 0.30 MM MAXIMUM FOR ALL OTHER GEOTEXTILE TYPES (#50 SIEVE). 0.15 MM MAXIMUM FOR ALL FABRIC TYPES (#100 SIEVE).
WATER PERMITTIVITY (ASTM D4491)	0.02 SEC ⁻¹ MINIMUM
GRAB TENSILE STRENGTH (ASTM D4632)	180 LBS. MINIMUM FOR EXTRA STRENGTH FABRIC. 100 LBS. MINIMUM FOR STANDARD STRENGTH FABRIC.
GRAB TENSILE STRENGTH (ASTM D4632)	30% MAXIMUM
ULTRAVIOLET RESISTANCE (ASTM D4355)	70% MAXIMUM

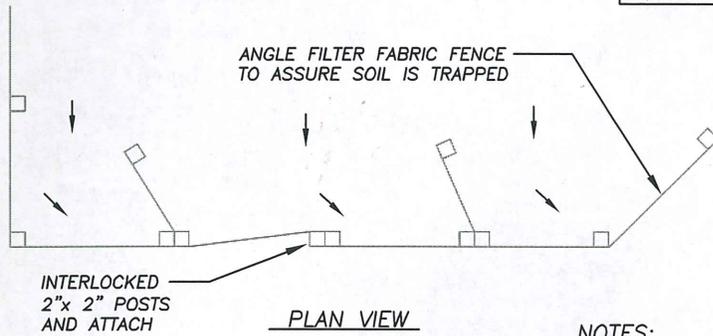

PLAN VIEW

NOTES:

1. BURY BOTTOM OF FILTER FABRIC 6" VERTICALLY BELOW FINISHED GRADE.
2. COMPACT BOTH SIDES OF FILTER FABRIC TRENCH.
3. SILT FENCE TO BE SPACED ON SLOPES PER TABLE BELOW.
4. SEDIMENT DEPOSITS MUST BE REMOVED WHEN DEPOSITS REACH APPROXIMATELY ONE-HALF THE HEIGHT OF THE BARRIER.
5. DAMAGED SILT FENCE SHALL BE REMOVED AND REPLACED PROMPTLY.
6. STAPLING OF SILT FENCE ONTO WOODEN POSTS IS NOT ALLOWED.
7. REFER TO BMP C233 IN VOLUME II OF THE WESTERN WASHINGTON MANUAL FOR MORE INFORMATION.

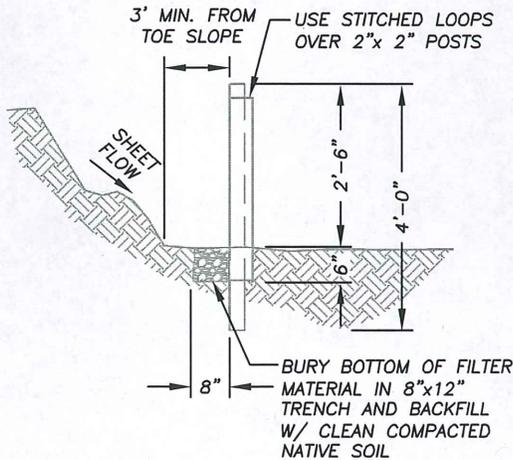

PROFILE

INSTALL PARALLEL ALONG CONTOURS AS FOLLOWS		
% SLOPE	SLOPE	MAX. SPACING ON SLOPE
10% FLATTER	10:1 OR FLATTER	300 FT.
10 > % < 15	10:1 > x < 7.5:1	150 FT.
15 > % < 20	7.5:1 > x < 5:1	100 FT.
20 > % < 30	5:1 > x < 3.5:1	50 FT.
30 > % < 50	3.5:1 > x < 2:1	25 FT.

N.T.S.

SILT FENCE

STANDARD
DETAIL



CITY OF BATTLE GROUND
APPROVED

Scott P. Savage 9-16-10
CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	8/12/98	BSG	GGH
2	8/30/05	ALL	MCH
3	9/15/10	RMJ	RMJ

EC-2.0