



TRUNK PROTECTION

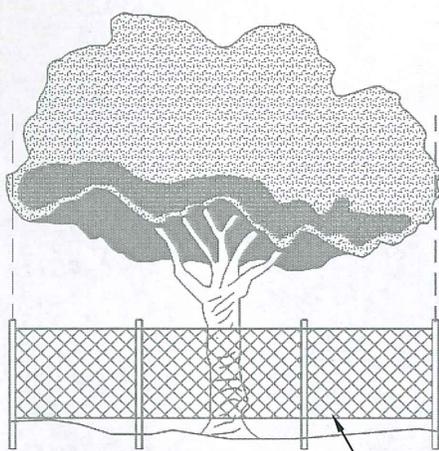

SINGLE TREE

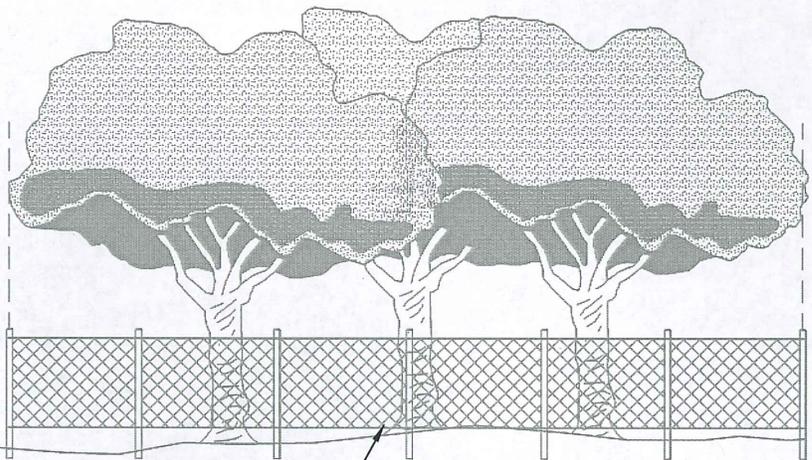

TREE CLUSTER

HIGH VISIBILITY PLASTIC MESH FENCING

FOR NOTES SEE STD. DETAIL EC-2.2B

SHEET 1 OF 2 N.T.S.

TREE PROTECTION FENCE

STANDARD
DETAIL



CITY OF BATTLE GROUND
APPROVED

Scott P. Sawyer 9-16-10
CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	9/15/10	RMJ	RMJ

EC-2.2A

THE FOLLOWING ACTIVITIES ARE PROHIBITED WITHIN THE LIMITS OF THE CRITICAL ROOT ZONE OF ANY PROTECTED TREE SUBJECT TO THE PROVISIONS OF THE TREE PRESERVATION ORDINANCE. THE FOLLOWING PROCEDURES SHALL BE FOLLOWED ON ALL TYPES OF CONSTRUCTION PROJECTS (INCLUDING RESIDENTIAL, COMMERCIAL, AND MUNICIPAL / PUBLIC DOMAIN PROJECTS).

1. MATERIAL STORAGE: NO STORAGE OR PLACEMENT OF MATERIALS INTENDED FOR USE IN CONSTRUCTION OR WASTE MATERIALS ACCUMULATED DUE TO EXCAVATION OR DEMOLITION SHALL BE PLACED WITHIN THE LIMITS OF THE CRITICAL ROOT ZONE OF ANY PROTECTED TREE.
2. EQUIPMENT CLEANING/LIQUID DISPOSAL: NO EQUIPMENT SHALL BE CLEANED OR OTHER LIQUIDS, INCLUDING, WITHOUT LIMITATION, PAINT, OIL, SOLVENTS, ASPHALT, CONCRETE, MORTAR OR SIMILAR MATERIALS DEPOSITED OR ALLOWED TO FLOW INTO THE CRITICAL ROOT ZONE OF A PROTECTED TREE.
3. TREE ATTACHMENTS: NO SIGNS, WIRES OR OTHER ATTACHMENTS, OTHER THAN THOSE OF A PROTECTIVE NATURE, SHALL BE ATTACHED TO ANY PROTECTED TREE.
4. VEHICULAR TRAFFIC: NO VEHICULAR AND/OR CONSTRUCTION EQUIPMENT TRAFFIC OR PARKING SHALL TAKE PLACE WITHIN THE CRITICAL ROOT ZONE OF ANY PROTECTED TREE OTHER THAN ON EXISTING STREET PAVEMENT. THIS RESTRICTION DOES NOT APPLY TO SINGLE INCIDENT ACCESS WITHIN THE CRITICAL ROOT ZONE FOR PURPOSES OF ESTABLISHING THE BUILDING PAD AND ASSOCIATED LOT GRADING, VEHICULAR TRAFFIC NECESSARY FOR ROUTINE UTILITY MAINTENANCE, EMERGENCY RESTORATION OF UTILITY SERVICE, OR ROUTINE MOWING OPERATIONS.
5. NO HEAVY EQUIPMENT, INCLUDING BUT NOT LIMITED TO TRUCKS, TRACTORS, TRAILERS, BULLDOZERS, BOBCAT TRACTORS, TRENCHERS, COMPRESSORS, AND HOISTS, SHALL BE ALLOWED INSIDE THE DRIP-LINE OF ANY PROTECTED TREE ON ANY CONSTRUCTION SITE WITHOUT PRIOR WRITTEN APPROVAL OF THE ADMINISTRATIVE OFFICIAL.

THE FOLLOWING PROCEDURES SHALL BE FOLLOWED ON ALL TYPES OF CONSTRUCTION PROJECTS (INCLUDING RESIDENTIAL, COMMERCIAL, AND MUNICIPAL / PUBLIC DOMAIN PROJECTS).

1. PROTECTIVE FENCING: PRIOR TO THE ISSUANCE OF ANY BUILDING OR EARTH DISTURBANCE PERMIT, OR COMMENCING CONSTRUCTION, THE OWNER, CONTRACTOR OR SUBCONTRACTOR SHALL CONSTRUCT AND MAINTAIN, FOR EACH PROTECTED TREE ON A CONSTRUCTION SITE, A PROTECTIVE FENCING WHICH ENCIRCLES THE OUTER LIMITS OF THE CRITICAL ROOT ZONE OF THE TREE TO PROTECT IT FROM CONSTRUCTION ACTIVITY OR IN CASES OF HEAVILY WOODED SITES, AS APPROVED BY THE ADMINISTRATIVE OFFICIAL.
2. ALL PROTECTIVE FENCING SHALL BE IN PLACE PRIOR TO COMMENCEMENT OF ANY SITE WORK AND REMAIN IN PLACE UNTIL ALL EXTERIOR CONSTRUCTION ACTIVITY AT THE SITE HAS BEEN COMPLETED.
3. PROTECTIVE FENCING SHALL BE AT LEAST FOUR (4) FEET HIGH, CLEARLY VISIBLE.
4. THE USE OF ORANGE VINYL CONSTRUCTION FENCING OR OTHER SIMILAR FENCING IS GENERALLY PERMITTED ONLY IF THERE IS NO CONSTRUCTION OR VEHICULAR ACTIVITY WITHIN TEN (10) FEET OF THE FENCE. IF CONSTRUCTION ACTIVITY OR VEHICULAR TRAFFIC IS EXPECTED WITHIN TEN (10) FEET OF THE FENCE, THE FENCE SHALL BE CONSTRUCTED OF CHAIN LINK OR OTHER SIMILAR METAL, WOODEN MATERIAL, OR SEMI-RIGID VINYL TAPE FENCING SUPPORTED WITH A TOP SUPPORT WIRE OR EQUIVALENT SUPPORT MATERIAL AFFIXED TO METAL OR WOODEN POSTS, ALL OF WHICH SHALL BE SIX (6) FEET IN HEIGHT.
5. ALL PROTECTIVE FENCING SHALL BE SUPPORTED AT A MAXIMUM OF TEN (10) FOOT INTERVALS BY APPROVED METHODS SUFFICIENT ENOUGH TO KEEP THE FENCE UPRIGHT AND IN PLACE FOR THE DURATION OF THE CONSTRUCTION.
6. THE OWNER SHALL CAUSE THE REQUIRED FENCING TO BE INSTALLED AND MAINTAINED FOR THE DURATION OF THE CONSTRUCTION.
7. FOR PERMITS INVOLVING TRENCHING SUCH AS SEWER SERVICES, IRRIGATION SYSTEMS, OR UNDERGROUND ELECTRICAL WORK, THE APPLICANT SHALL PROVIDE SUFFICIENT PLANS TO PROVIDE PROTECTION OF THE TREES IN THE VICINITY OF THE WORK.
8. ALL OF THE ABOVE CONDITIONS MUST BE ADHERED TO AND INSPECTED BY A CITY INSPECTOR PRIOR TO THE ISSUANCE OF ANY PERMITS.
9. IN SITUATIONS WHERE A PROTECTED TREE REMAINS IN THE IMMEDIATE AREA OF INTENDED CONSTRUCTION AND THE TREE MAY BE IN DANGER OF BEING DAMAGED BY CONSTRUCTION EQUIPMENT OR OTHER ACTIVITY, THE CONTRACTOR OR SUBCONTRACTOR SHALL PROTECT THE TREE WITH 2"x4" LUMBER ENCIRCLED WITH WIRE OR OTHER MEANS THAT DO NOT DAMAGE THE TREE. THE INTENT IS TO PROTECT THE TRUNK OF THE TREE AGAINST INCIDENTAL CONTACT BY LARGE CONSTRUCTION EQUIPMENT.

FOR DETAIL SEE STD. DETAIL EC-2.2A

SHEET 2 OF 2 N.T.S.

TREE PROTECTION FENCE

STANDARD
DETAIL



CITY OF BATTLE GROUND
APPROVED

Scott P. Sawyer 9-16-10
CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	9/15/10	RMJ	RMJ

EC-2.2B