


**NOTES:**

- ① INTERLOCKING PLASTIC TIES OR 1/2" DIA BLACK RUBBER HOSE AND 12 GA WIRE, TIE AT 2/3 TREE HEIGHT. DO NOT OVERTIGHTEN.
- ② (2) 2"x2" CEDAR STAKE OR METAL FENCE POST STAKES, SHOULD BE LOCATED OUTSIDE OF ROOTBALL. DO NOT PENETRATE ROOT BALL.
- ③ MULCH 3" DEEP . KEEP AWAY FROM TREE TRUNK.
- ④ INSTALL ROOT BARRIER PANELS W/ 90° ROOT DEFLECTING RIBS, 24" DEPTH, INSTALL ROOT BARRIER AGAINST CONCRETE SURFACE WITH RIBS FACING TREE, 1/2" ABOVE GRADE. FOR MEDIAN AND PLANTER STRIP PROVIDE 12 LINEAR FEET ALONG EDGE OF CURB AND 12 LINEAR FEET ALONG EDGE OF SIDEWALK. CENTER ON TREE. FOR TREE WELLS PROVIDE ROOT BARRIER AROUND PERIMETER.
- ⑤ SOIL WITHIN PLANTING STRIP SHALL BE 2' DEEP AND BE COBG SOIL MIX OF 1/3 COMPOSTED ORGANIC MULCH, 1/3 IMPORTED LOAM TOPSOIL AND 1/3 CLEAN NATIVE TOPSOIL.
- ⑥ REMOVE METAL CAGE OR BURLAP/TWINE FROM ROOT BALL. LOOSEN OR REMOVE GIRDLED ROOTS. SET TRUNK FLARE LEVEL WITH FINISHED GRADE. PROVIDE POSITIVE DRAINAGE AWAY FROM ROOT BALL.
- ⑦ FORM CONE OF TAMPED SOIL AND PLACE ROOT BALL ON TOP.
- ⑧ 6' MINIMUM CLEARANCE TO FIRST BRANCH.
- ⑨ SCARIFY NATIVE OR COMPACTED SOIL TO ALLOW FOR ROOT PENETRATION.
- ⑩ MIN. 2" CALIPER TREE WITH STRONG CENTRAL LEADER.
- ⑪ CONSTRUCT MULCH RING BY MOUNDING ADDITIONAL MULCH 3" HIGH BY 4" WIDE APPROXIMATELY 1.5' FROM PLANT. WATER IMMEDIATELY AFTER INSTALLATION AND WITH 5-10 GALLONS PER WEEK THEREAFTER.
- ⑫ APPLY PRE-EMERGENT HERBICIDE OVER MULCH PER MANUFACTURER'S SPECIFICATIONS. DO NOT APPLY IN STORM DITCH OR AREAS ADJACENT TO STANDING WATER & WETLANDS.

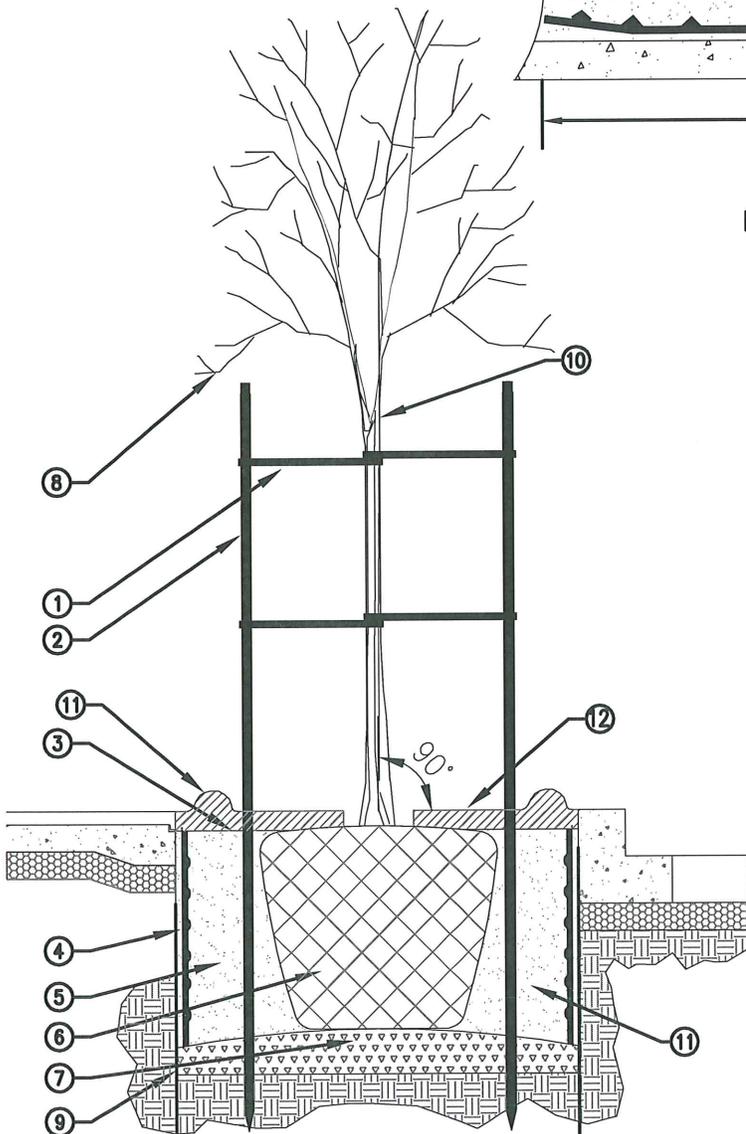


EXCAVATE AND AMEND SOIL FOR ENTIRE PLANTER/MEDIAN

N.T.S.

**PLANTER STRIP/MEDIAN TREE PLANTING**

PLAN #

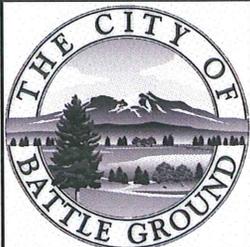

CITY OF BATTLE GROUND APPROVED

*Scott P. Sawyer* 3-5-12  
CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	9/21/08	CMS	MCH
2	4/7/10	JMH	ME
3	7/20/11	CMS	ME
4	2/28/12	JMH	ME

PL-1.01