

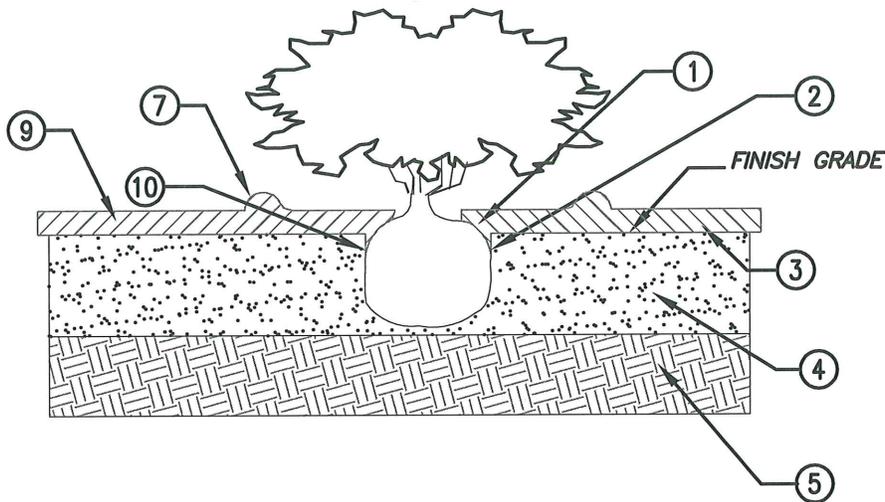


TYPICAL SHRUB PLANTING

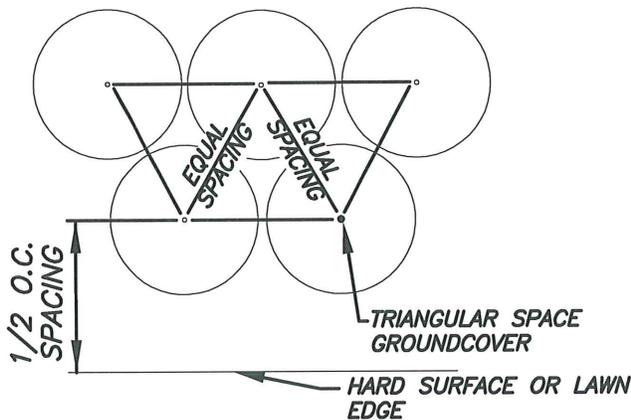

TYPICAL GROUND COVER PLANTING

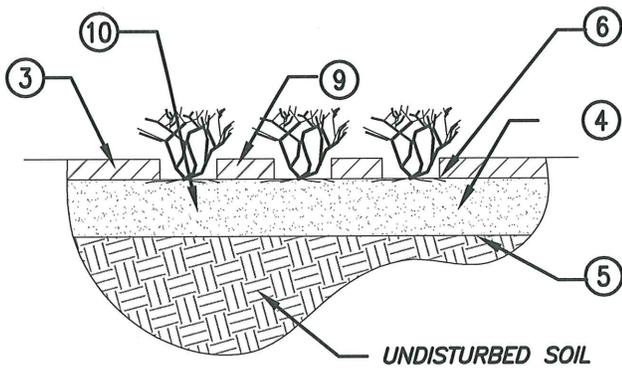


NOTES:

- ① SET CROWN 1" ABOVE FINISHED GRADE.
- ② REMOVE CONTAINER FROM ROOT BALL, GENTLY MASSAGE ROOT BALL TO LOOSEN ROOTS.
- ③ MULCH 3" DEEP. DO NOT PLACE MULCH IN CONTACT WITH PLANT STEMS.
- ④ PROVIDE 2 FEET OF COBG SOIL MIX OF 1/3 COMPOSTED ORGANIC MULCH, 1/3 IMPORTED LOAM TOPSOIL AND 1/3 CLEAN NATIVE TOPSOIL.
- ⑤ SCARIFY BOTTOM OF NATIVE OR COMPACTED SOIL.
- ⑥ PLANT GROUND COVER AT GRADE
- ⑦ CONSTRUCT A MULCH RING BY MOUNDING ADDITIONAL MULCH 3" HIGH BY 4" WIDE APPROXIMATELY 1.5' FROM PLANT. WATER IMMEDIATELY AFTER INSTALLATION AND WITH 5-10 GALLONS PER WEEK THEREAFTER.
- ⑧ PLANT QUANTITIES INDICATED ON PLANS ARE FOR THE CONVENIENCE OF THE CONTRACTOR ONLY. INSTALL NUMBER OF PLANTS AS DRAWN ON THE PLAN.
- ⑨ APPLY PRE-EMERGENT HERBICIDE OVER MULCH PER MANUFACTURER'S SPECIFICATIONS. DO NOT APPLY IN STORM DITCH OR AREAS ADJACENT TO STANDING WATER AND WETLANDS.
- ⑩ PROVIDE SLOW RELEASE FERTILIZER TABLETS (20-10-5, 10 GRAM, AGRIFORM OR EQUAL) DURING BACKFILL AT MID-DEPTH, 1" FROM ROOTS PER MANUFACTURER'S SPECIFICATIONS.

N.T.S.

SHRUB AND GROUND COVER PLANTING DETAILS

PLAN #



CITY OF BATTLE GROUND
APPROVED

Scott P. Sawyer 3-5-12
CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	7/20/11	CMS	ME
2	2/28/12	JMH	ME

PL-1.03