
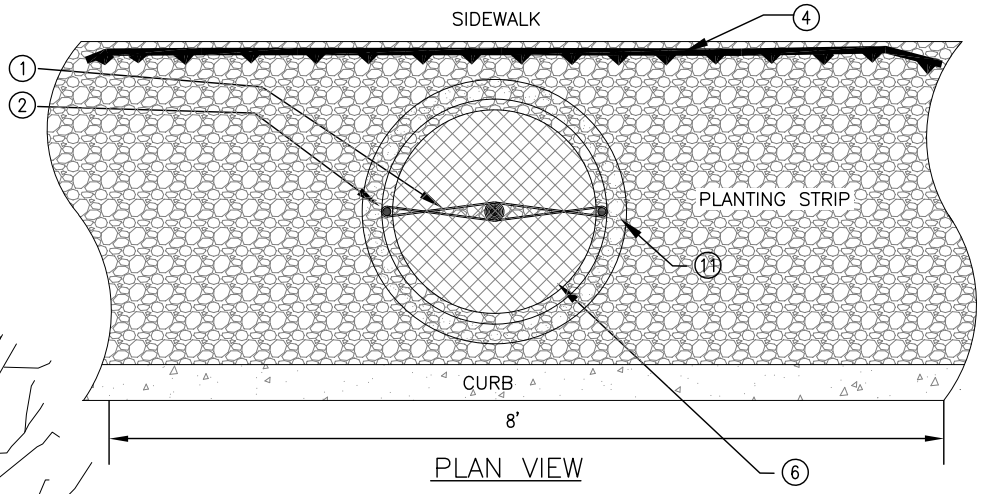


PLAN VIEW

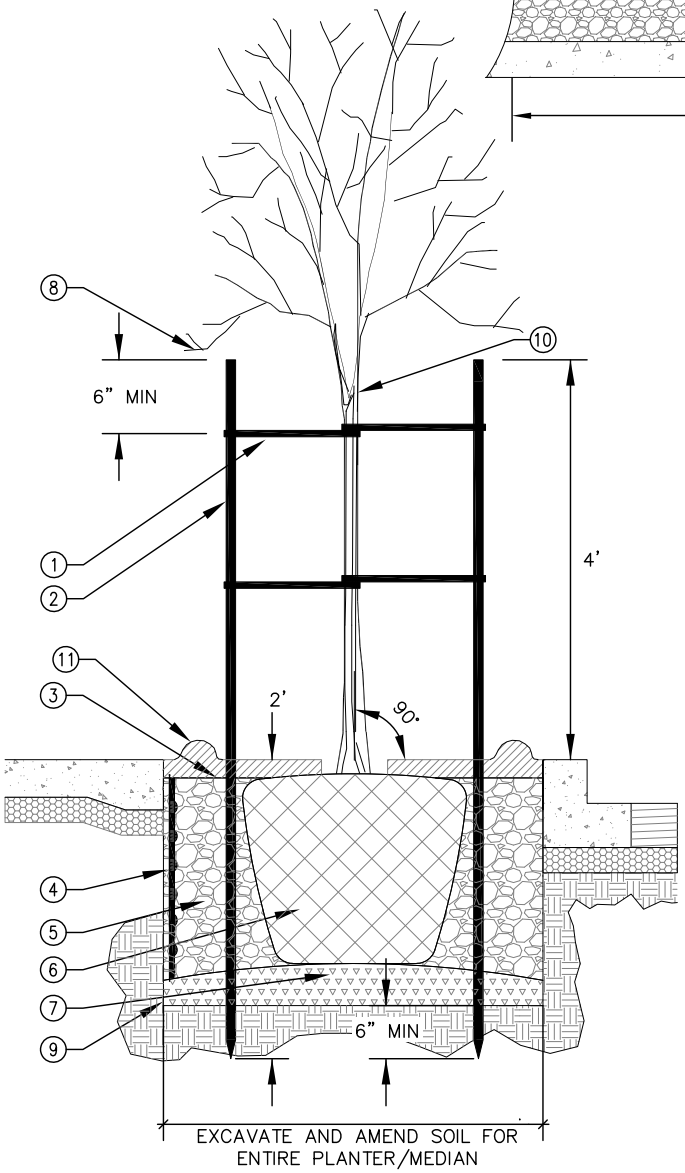

SECTION VIEW

NOTES:

1. 1" WIDTH PLASTIC TREE TIE. LOOP AROUND TRUCK IN FIGURE 8 PATTERN. DO NOT TIE TREE TO TRUNK.
2. (2) 6"x2"x2" WOODEN STAKE POSTS DRIVEN 24" MINIMUM DEPTH, OUTSIDE OF ROOTBALL. DO NOT PENETRATE ROOTBALL. PLACE STAKES PARALLEL TO SIDEWALK. REMOVE STAKES AND TREE TIES ONE FULL YEAR AFTER PLANTING.
3. MULCH 3" DEEP . KEEP AWAY FROM TREE TRUNK.
4. IF TREE IN NOT WITHIN 5' OF SIDEWALK, ROOT BARRIER IS NOT REQUIRED. PROVIDE MINIMUM 8 LF PER TREE AT 12" MINIMUM DEPTH. INSTALL ROOT BARRIER PANELS AGAINST CONCRETE SIDEWALK EDGE WITH TOP OF BARRIER FLUSH WITH CONCRETE FINISH GRADE. FOR TREE WELLS PROVIDE ROOT BARRIER ON THREE SIDES, AVOIDING THE CURB/ROADWAYS SIDE. INSTALL ROOT BARRIER ON SIDEWALK SIDE ONLY.
5. SOIL WITHIN PLANTING STRIP SHALL BE 2' DEEP AND BE COBG SOIL MIX OF 1/3 COMPOSTED ORGANIC MULCH, 1/3 IMPORTED LOAM TOPSOIL AND 1/3 CLEAN NATIVE TOPSOIL.
6. REMOVE METAL CAGE OR BURLAP/TWINE FROM ROOT BALL. LOOSEN OR REMOVE GIRDLED ROOTS. SET TRUNK FLARE LEVEL WITH FINISHED GRADE. PROVIDE POSITIVE DRAINAGE AWAY FROM ROOT BALL.
7. FORM CONE OF TAMPED SOIL AND PLACE ROOT BALL ON TOP.
8. 6' MINIMUM CLEARANCE TO FIRST BRANCH.
9. SCARIFY NATIVE OR COMPACTED SOIL TO ALLOW FOR ROOT PENETRATION.
10. MIN. 2" CALIPER TREE WITH STRONG CENTRAL LEADER.
11. CONSTRUCT MULCH RING BY MOUNDING ADDITIONAL MULCH 3" HIGH BY 4" WIDE APPROXIMATELY 1.5' FROM PLANT. WATER IMMEDIATELY AFTER INSTALLATION AND WITH 5–10 GALLONS PER WEEK THEREAFTER.
12. WATER IMMEDIATELY AFTER INSTALLATION. DURING THE ESTABLISHMENT PERIOD, PROVIDE A MINIMUM OF 10 GALLONS PER WEEK OF SUPPLEMENTAL WATER DURING THE DRY MONTHS.

N.T.S.

PLANTER STRIP/MEDIAN TREE PLANTING

PLAN #

THE CITY OF BATTLE GROUND

CITY OF BATTLE GROUND
APPROVED

Ryan M. Jaynes 1/16/24
CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	9/21/08	CMS	MCH
2	4/7/10	JMH	ME
3	7/20/11	CMS	ME
4	2/28/12	JMH	ME
5	1/16/24	RMJ	RMJ

PL–1.01