


TYPICAL SHRUB PLANTING

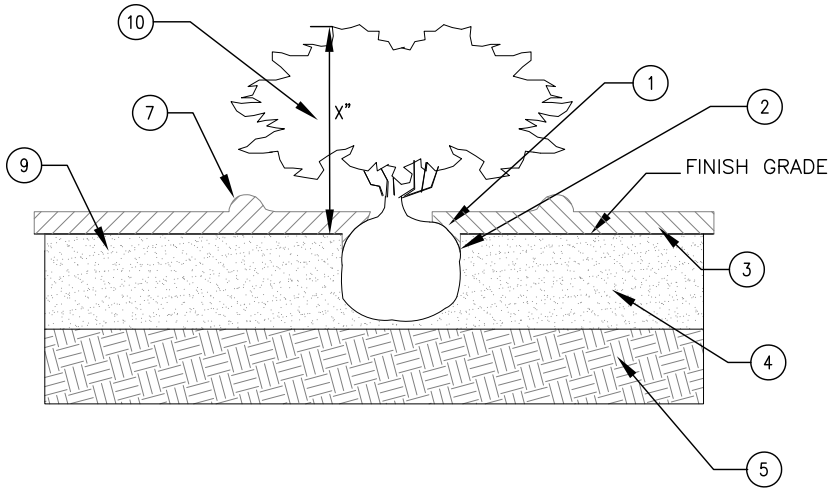

TYPICAL GROUND COVER PLANTING

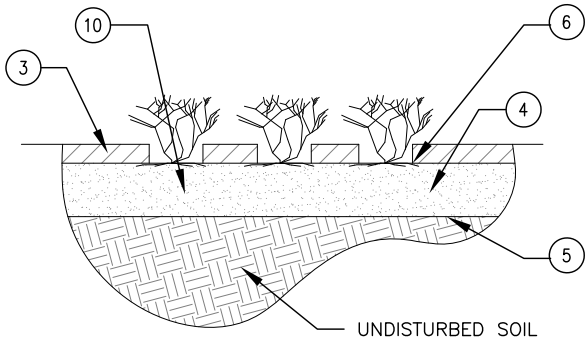

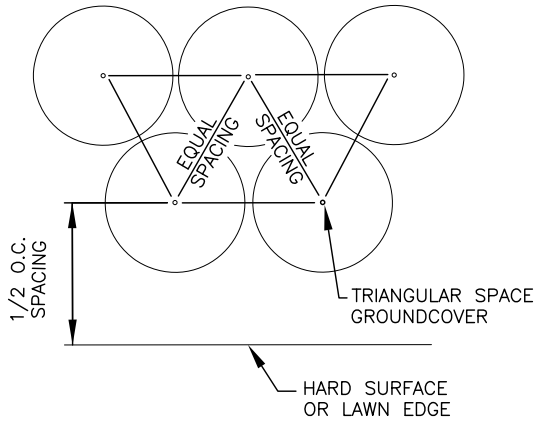

NOTES:

1. SET CROWN 1" ABOVE FINISHED GRADE.
2. REMOVE CONTAINER FROM ROOT BALL, GENTLY MASSAGE ROOT BALL TO LOOSEN ROOTS.
3. MULCH 3" DEEP. DO NOT PLACE MULCH IN CONTACT WITH PLANT STEMS.
4. PROVIDE 24" MINIMUM DEPTH OF COBG SOIL MIX OF 1/3 COMPOSTED ORGANIC MULCH, 1/3 IMPORTED LOAM TOPSOIL AND 1/3 CLEAN NATIVE TOPSOIL.
5. SCARIFY BOTTOM OF NATIVE OR COMPACTED SOIL.
6. PLANT GROUND COVER AT GRADE
7. CONSTRUCT A MULCH RING BY MOUNDING ADDITIONAL MULCH 3" HIGH BY 4" WIDE APPROXIMATELY 1.5' FROM PLANT. WATER IMMEDIATELY AFTER INSTALLATION AND WITH 5–10 GALLONS PER WEEK THEREAFTER.
8. PLANT QUANTITIES INDICATED ON PLANS ARE FOR THE CONVENIENCE OF THE CONTRACTOR ONLY. INSTALL NUMBER OF PLANTS AS DRAWN ON THE PLAN.
9. PROVIDE SLOW RELEASE FERTILIZER TABLETS (20–10–5, 10 GRAM, AGRIFORM OR EQUAL) DURING BACKFILL AT MID–DEPTH, 1" FROM ROOTS PER MANUFACTURE'S SPECIFICATIONS.
10. REFER TO CITY'S VISION CLEARANCE & SIGHT DISTANCE STANDARDS FOR MATURE SHRUB HEIGHT MAXIMUMS AT INTERSECTION OR DRIVEWAY APRONS. SELECT SHRUB SPECIES/CULTIVARS THAT DO NOT EXCEED THE MAXIMUM HEIGHTS AT MATURITY FOR PLANTINGS WITH THESE CLEAR AREAS.

N.T.S.

SHRUB AND GROUND COVER PLANTING DETAILS

PLAN #

THE CITY OF BATTLE GROUND

CITY OF BATTLE GROUND
APPROVED

Ryan M. Jeynes 1/16/24
CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	7/20/11	CMS	ME
2	2/28/12	JMH	ME
3	1/16/24	RMJ	RMJ

PL–1.03