


EXPANSION/ISOLATION JOINT DETAIL

① 3/8" JOINT FILLER FOR SIDEWALKS, ADA RAMPS, AND DRIVEWAYS

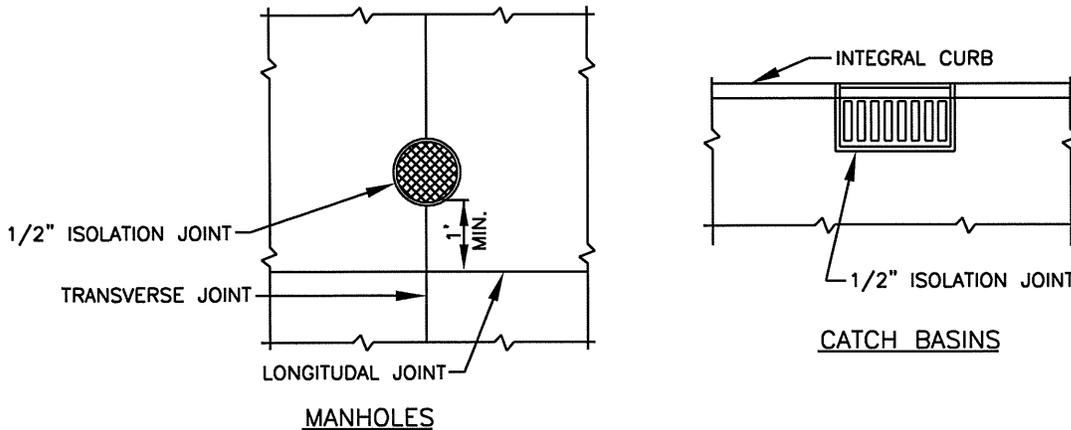

NOTES:

1. CONTRACTION JOINTS MAY BE USED IN PLACE OF SURFACE JOINTS.
2. CONSTRUCTION COLD JOINTS MAY BE USED IN PLACE OF CONTRACTION JOINTS.
3. CONCRETE PAVEMENT LOAD TRANSFER REQUIREMENTS ACROSS JOINTS SHALL BE DETERMINED BY PCC PAVEMENT DESIGN.
4. PARALLEL JOINTS SHALL BE SEPARATED BY A MINIMUM OF 2'.

N.T.S.

CONCRETE JOINTS

PLAN #



CITY OF BATTLE GROUND
APPROVED

Rb

6/9/08

CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	1/31/08	JMH	MCH
2	6/9/08	JMH	MCH

TR-5.01