
NEIGHBORHOOD COLLECTOR

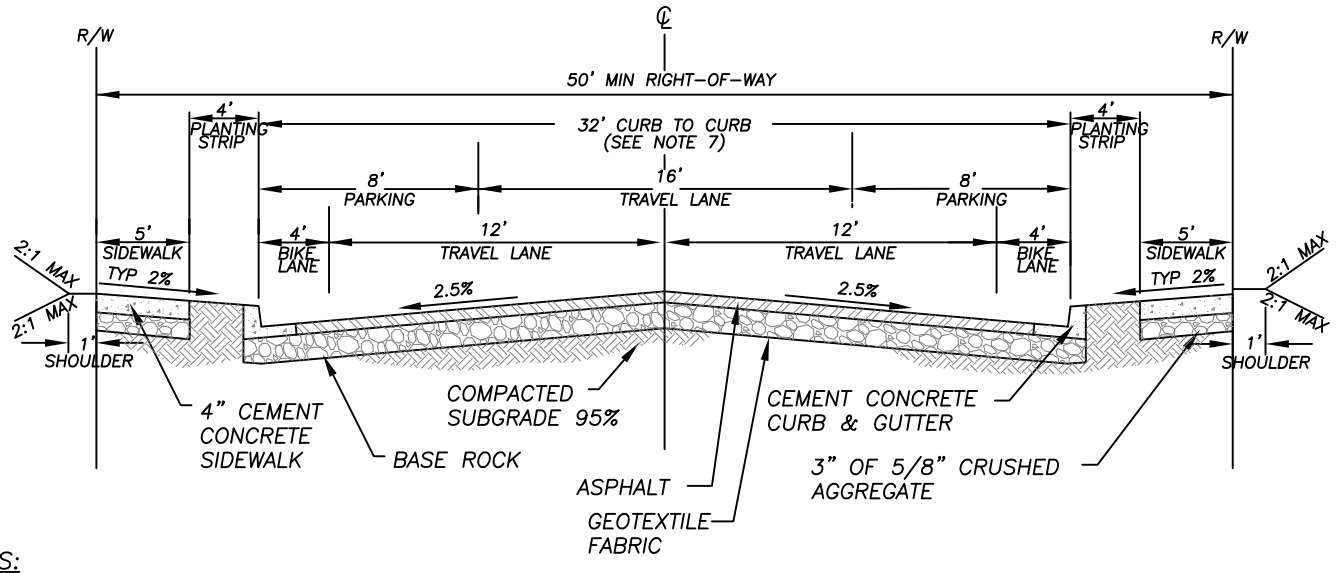

NOTES:

1. SUBGRADE GEOTEXTILE FABRIC SHALL BE WOVEN AND MEET THE REQUIREMENTS FOR SOIL STABILIZATION PER WSDOT 9-33.2(1) TABLE 3 SHALL BE INSTALLED OVER SOILS PRIOR TO CONSTRUCTING THE BASE AND SURFACING.
2. BASE ROCK SHALL CONFIRM TO WSDOT 9-03.9(3) FOR CRUSHED SURFACING BASE COURSE.
3. ASPHALT CONCRETE FOR ALL ROADS SHALL BE CLASS 3/8" PG 58H-22, PLACED IN LIFTS, AS SPECIFIED IN THE STANDARD SPECIFICATIONS. TIMING OF EACH LIFT SHALL BE APPROVED BY CITY ENGINEER.
4. ASPHALT SHALL HAVE A MINIMUM THICKNESS OF 5.4 INCHES AND THE BASE ROCK SHALL HAVE A MINIMUM THICKNESS OF 12 INCHES.
5. ROAD CONSTRUCTION BETWEEN OCTOBER 1 AND APRIL 1 SHALL REQUIRE A WET WEATHER PLAN. PLAN SHALL BE SUBMITTED TO THE CITY INSPECTOR.
6. THE APPLICABLE WSDOT STANDARD SPECIFICATIONS APPLY TO PAVING IN THE CITY OF BATTLE GROUND.
7. PRIOR TO PAVING A ROAD GRADER SHALL BE USED TO ESTABLISH A SMOOTH UNIFORM SURFACE THAT IS IT FREE OF CHATTER AND RIPPLES.
8. STREET LIGHTING, SIGNING, LANDSCAPING, AND WATER METERS SHALL BE INSTALLED IN THE PLANTER STRIP.
9. WHEN A MEDIAN IS INSTALLED THE WIDTH IS 10' FROM FACE OF CURB TO FACE OF CURB. YELLOW STRIPING IS TO BE PLACED 1' ON EACH SIDE OF THE CURB.

N.T.S.

THE CITY OF BATTLE GROUND

CITY OF BATTLE GROUND APPROVED

Ryan M. Jeynes 8/15/2025

CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	8/12/98	BSG	GGH
2	6/2/08	MCH	MCH
3	8/5/25	AJH	MCH

STANDARD DETAIL

TR-2.06