
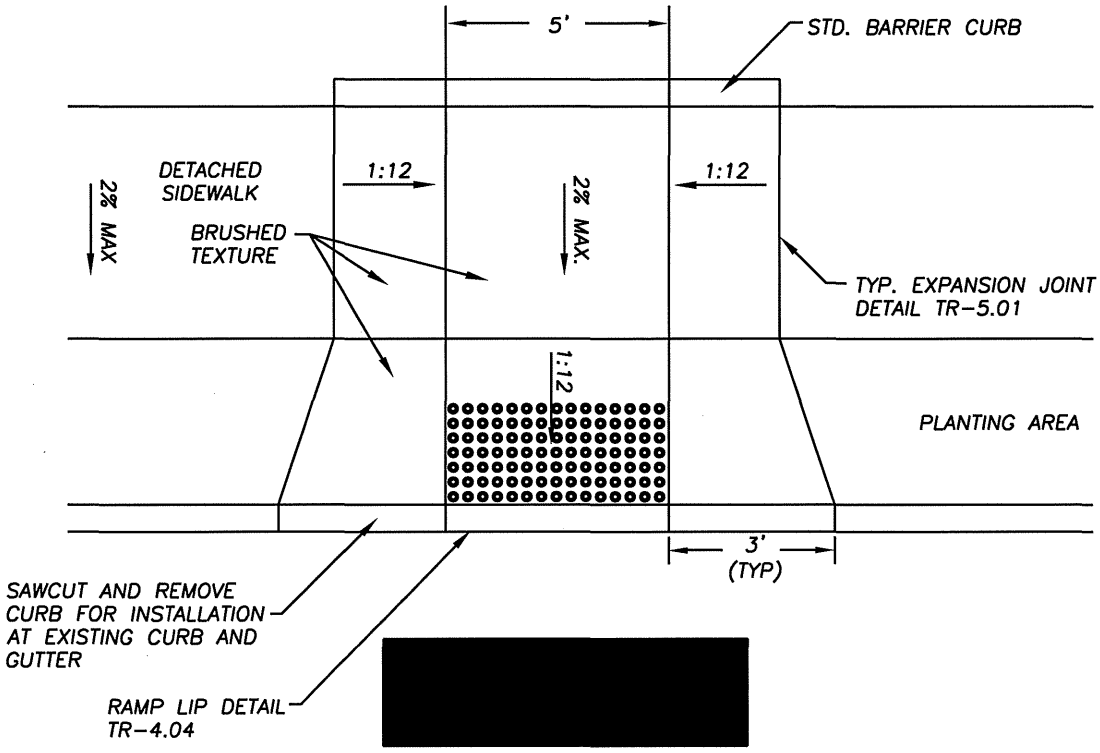


[redacted]

[redacted]

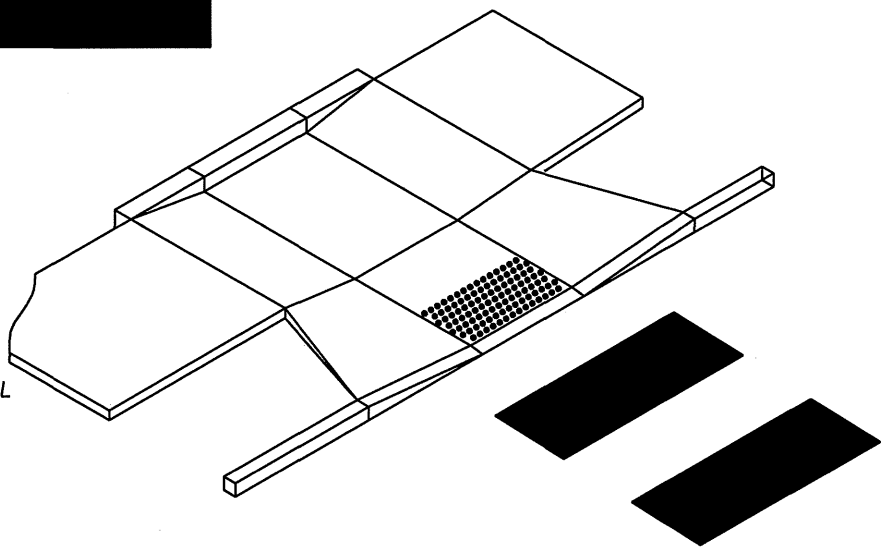

NOTES:

1. CURB RAMPS TO BE CENTERED WITHIN CROSSWALK.
2. APPLY HEAVY BROOM FINISH ON ALL SLOPES GREATHER THAN 2%.
3. PRECAST TRUNCATED DOMES REQUIRED ON ALL CURB RAMPS, PER DETAIL TR-4.04.
4. RAMPS SHALL HAVE A BRUSHED TEXTURE SURFACE APPLIED TO THE STILL FRESH CONCRETE.

N.T.S.

TYPE 2A CURB RAMP

PLAN #

CITY OF BATTLE GROUND APPROVED

6/6/08

CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	8/12/98	BSG	GGH
2	8/30/05	ALL	MCH
3	6/6/08	MCH	MCH

TR-4.07