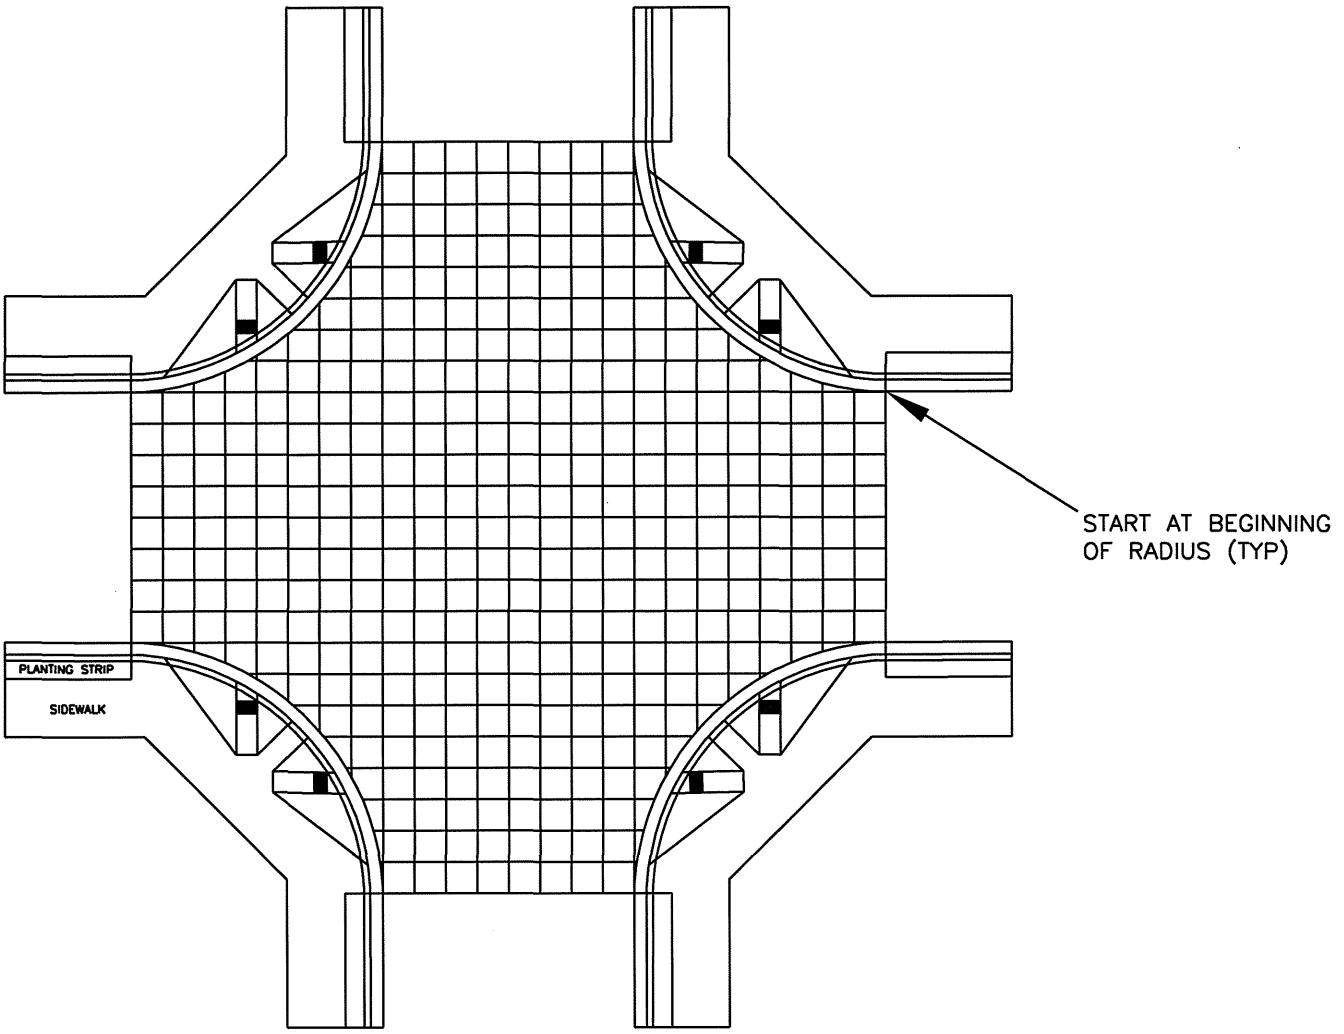


NOTES:

1. CONCRETE TO BE PLACED AT FINAL GRADE.
2. CONCRETE TO BE 3000 PSI MEETING WSDOT STANDARD SPECIFICATIONS 6-02.3(2)B AND A MINIMUM OF 8" THICK WITH THICKNESS OF BASE ROCK EQUAL TO BASE ROCK UNDER THE ASPHALT.
3. INSTALL #3 REBAR AT 18" MAX. SPACING IN BOTH DIRECTIONS.
4. SCORE CONCRETE AT 5' INTERVALS WITH SET OF PANELS CENTERED ON THE CENTERLINE OF THE ADA RAMPS.
5. PROVIDE CONTROL JOINTS AT 15' INTERVALS, DETAIL TR-5.01.

N.T.S.

CONCRETE INTERSECTION

PLAN #

THE CITY OF BATTLE GROUND

CITY OF BATTLE GROUND
APPROVED

6/10/08

CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	6/10/08	JMH	MCH

TR-6.11