

EXISTING CONIFEROUS TREE TO REMAIN (TYP)  
 DIG AND GRUB OUT STUMP. IMPORT SOIL IF NECESSARY.  
 DRY STREAM BED - 9"-12" DEEP

(+18")  
 (-9"-12")  
 (+12")  
 (-9"-12")

EXISTING PATIO  
 MOUND OR SWALE - HEIGHT IN (").



WITHIN FENCED AREA  
 - RETAIN ALL TREES - UNLESS NOTED OTHERWISE.  
 - REMOVE ALL SHRUBS, GRASSES AND PERENNIALS.  
 - DIG, DIVIDE & RE-POT (17) SWORD FERN.  
 REMOVE EXISTING TREE IN THIS LOCATION

STORAGE SHED  
 EXISTING DECIDUOUS TREE TO REMAIN (TYP)  
 PRUNE AND CLEAN UP AS NEEDED  
 CLEAR AND GRUB ALL SHRUBS, PERENNIALS AND GROUND COVERS. TREES TO REMAIN.  
 KILL NEEDLES & GRUB

COMMUNITY CENTER BUILDING

PRUNE AND CLEAN UP AS NEEDED  
 REMOVE LAWN AND INSTALL BARK IN PLANTING STRIP  
 PRUNE AND CLEAN UP AS NEEDED. PRESERVE BULBS AT SE CORNER OF BED

CLEAR AND GRUB EXISTING SHRUBS  
 PRESERVE BULBS IN FRONT OF WEST BANK OF WINDOWS  
 CLEAR AND GRUB EXISTING SHRUBS

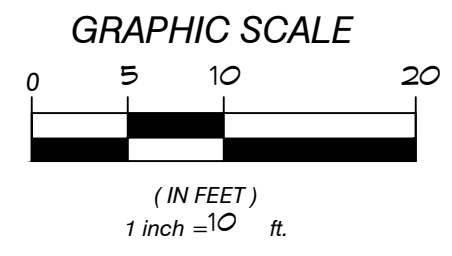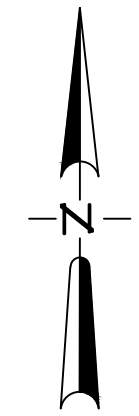

**Project:**  
 BATTLE GROUND COMMUNITY CENTER  
 BATTLE GROUND, WA  
 RENOVATION LANDSCAPE PLAN

CHANGES / REVISIONS	
DESCRIPTION:	DATE:

CONTACT:  
 SAK Land Design  
 ATTN: Stacy Kysar  
 P.O. Box 1606  
 Brush Prairie, WA  
 98606  
 (509) 370-0915  
 saklanddesign@gmail.com

DRAWN: SAK  
 DATE: JULY 2021  
 SCALE: NONE  
 COPYRIGHT 2021