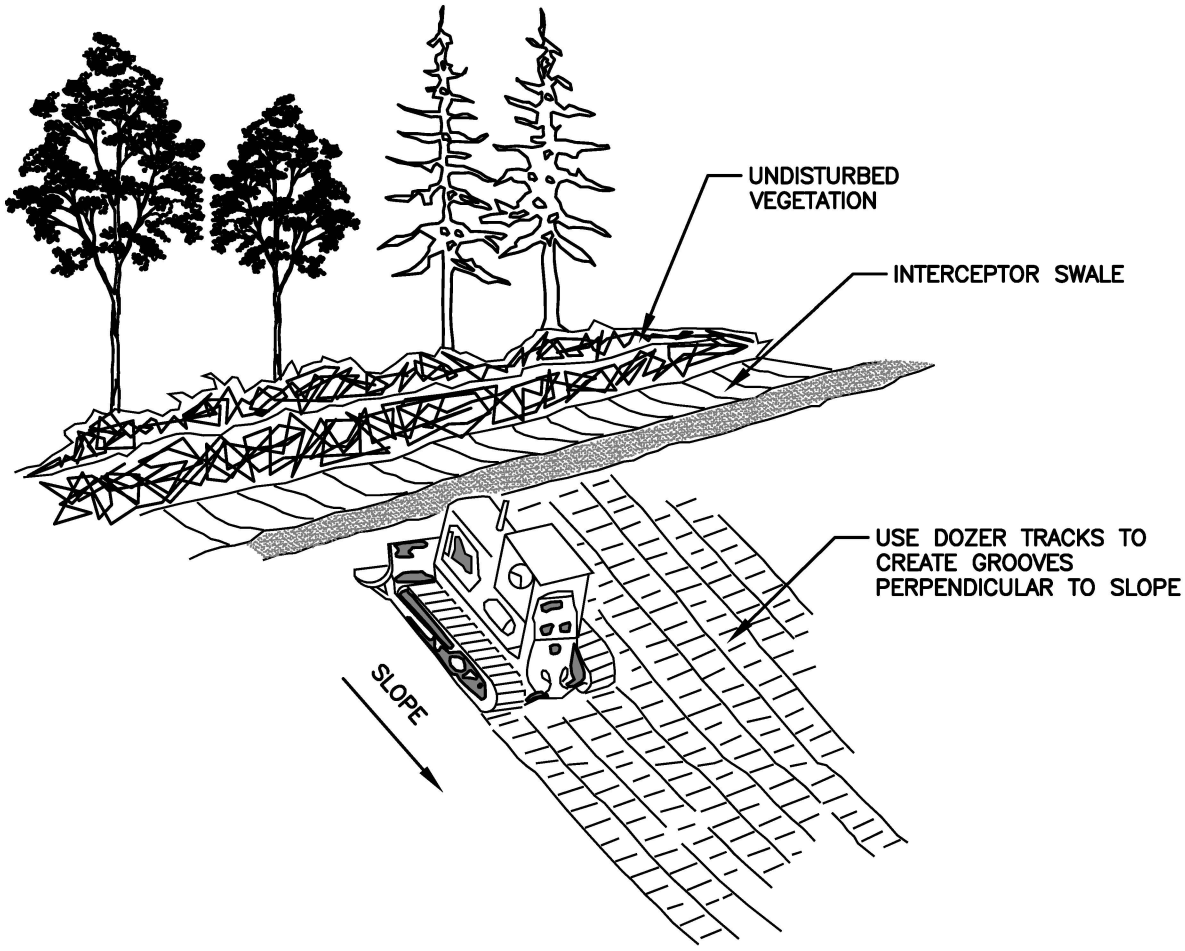


NOTES:

1. ALL SLOPES STEEPER THAN 3:1 AND GREATER THAN 5 VERTICAL FEET SHALL BE SURFACED ROUGHENED.
2. AREAS WITH GRADES STEEPER THAN 3:1 SHALL BE ROUGHENED TO A DEPTH OF 2"–4" PRIOR TO SEEDING.
3. AREAS THAT WILL NOT BE STABILIZED IMMEDIATELY SHALL BE ROUGHENED TO REDUCE RUNOFF VELOCITY UNTIL SEEDING TAKES PLACES.
4. SLOPES WHERE MOWING IS PLANNED SHOULD NOT BE EXCESSIVELY ROUGHENED.
5. REFER TO BMP C130 IN VOLUME II OF THE STORMWATER MANAGEMENT MANUAL FOR WESTERN WASHINGTON FOR MORE INFORMATION.

N.T.S.

SURFACE ROUGHENING (TRACKING)

STANDARD DETAIL

THE CITY OF BATTLE GROUND

CITY OF BATTLE GROUND
APPROVED

Mark Henry 06/11/2018

CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	9/15/10	RMJ	RMJ
2	3/20/17	CAS	KDU

EC–8.02