
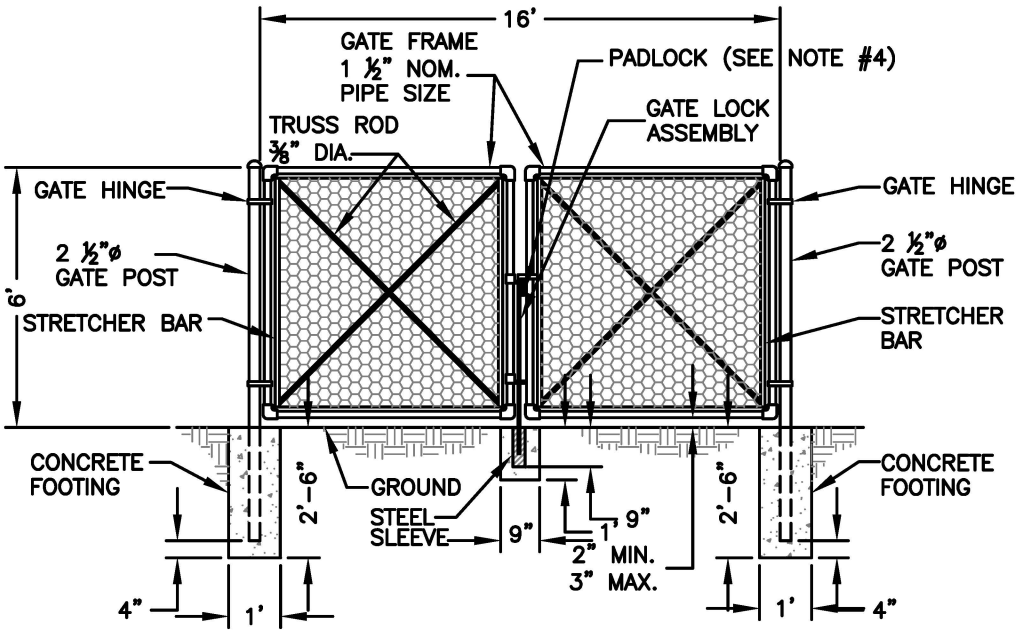


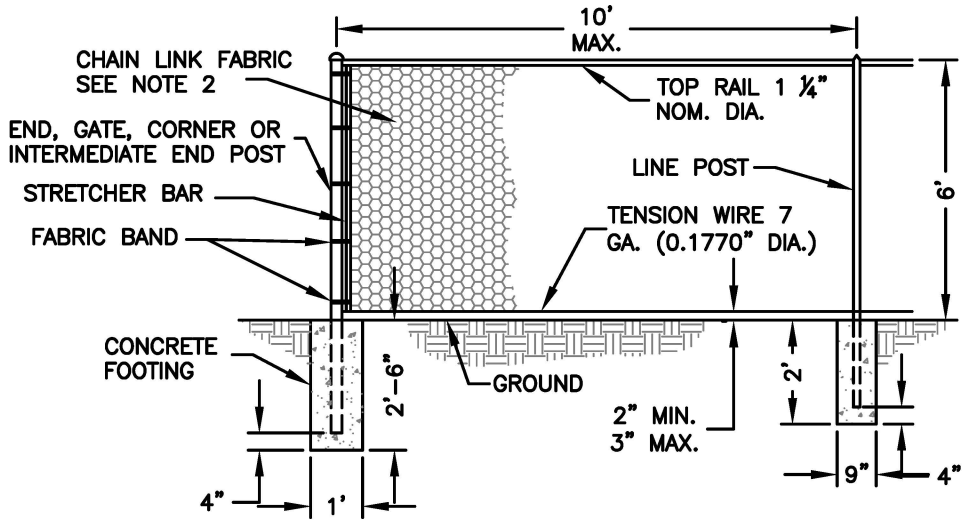

NOTES:

1. ALL MATERIAL AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE CURRENT STATE OF WASHINGTON STANDARD SPECIFICATIONS FOR ROAD, BRIDGE, AND MUNICIPAL CONSTRUCTION.

2. CHAIN LINK FENCE FABRIC TO MEET OR EXCEED REQUIREMENTS OF WSDOT STANDARD SPECIFICATIONS 9-16.1(1)A. CHAIN LINK FENCE FABRIC SHALL BE HOT DIP GALVANIZED WITH A MINIMUM OF 0.8 OUNCE PER SQUARE FOOT OF SURFACE AREA. FENCING MATERIALS SHALL BE COATED WITH AN ULTRAVIOLET INSENSITIVE PLASTIC OR OTHER INERT MATERIAL AT LEAST 2 MILS IN THICKNESS. ANY PRETREATED OR COATING SHALL BE APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S WRITTEN INSTRUCTIONS. THE MANUFACTURER'S WRITTEN SPECIFICATIONS DETAILING THE PRODUCT AND METHOD OF FABRICATION SHALL BE PROVIDED TO CITY OF BATTLE GROUND PRIOR TO CONSTRUCTION.

3. FENCE SHALL BE BLACK VINYL COATED.

4. FENCE SHALL BE STRETCHED FROM CORNER POST TO CORNER POST. WRAPPING OF FENCE AROUND CORNER POST IS NOT PERMITTED.

5. CONTRACTOR TO BE RESPONSIBLE FOR SUPPLYING LOCK. SPECIFICATIONS ON LOCK TO BE PROVIDED BY CITY INSPECTOR.

N.T.S.

CHAIN LINK FENCE & GATE

STANDARD DETAIL

CITY OF BATTLE GROUND
APPROVED

Mark Henry 06/11/2018

CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	8/12/98	BSG	GGH
2	7/22/09	RMJ	RMJ
3	4/17/17	CAS	KDU

ST-8.00