
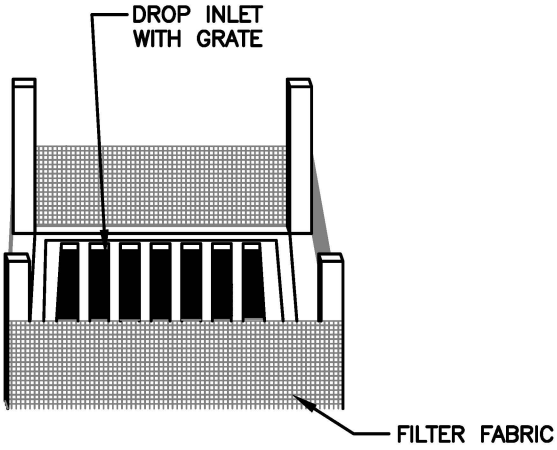


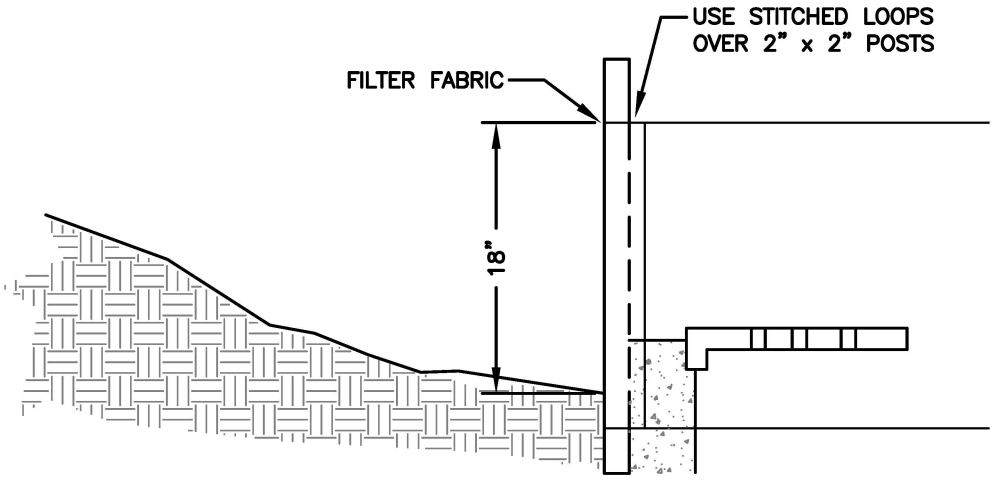

PROFILE

NOTES:

1. BURY BOTTOM OF FILTER FABRIC 6" VERTICALLY BELOW FINISHED GRADE.
2. COMPACT BOTH SIDES OF FILTER FABRIC TRENCH.
3. SEDIMENT DEPOSITS MUST BE REMOVED WHEN DEPOSITS REACH APPROXIMATELY ONE–HALF THE HEIGHT OF THE BARRIER.
4. DAMAGED SILT FENCE SHALL BE REMOVED AND REPLACED PROMPTLY.
5. STAPLING OF SILT FENCE ONTO WOODEN POSTS IS NOT ALLOWED.
6. REFER TO BMP C220 IN VOLUME II OF THE WESTERN WASHINGTON MANUAL FOR MORE INFORMATION.

N.T.S.

INLET PROTECTION (SILT FENCE)

STANDARD DETAIL

THE CITY OF BATTLE GROUND

CITY OF BATTLE GROUND
APPROVED

Mark Hennes

06/11/2018

CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	8/12/98	BSG	GGH
2	8/30/05	ALL	MCH
3	9/15/10	RMJ	RMJ
4	3/07/17	CAS	KDU

EC–4.03