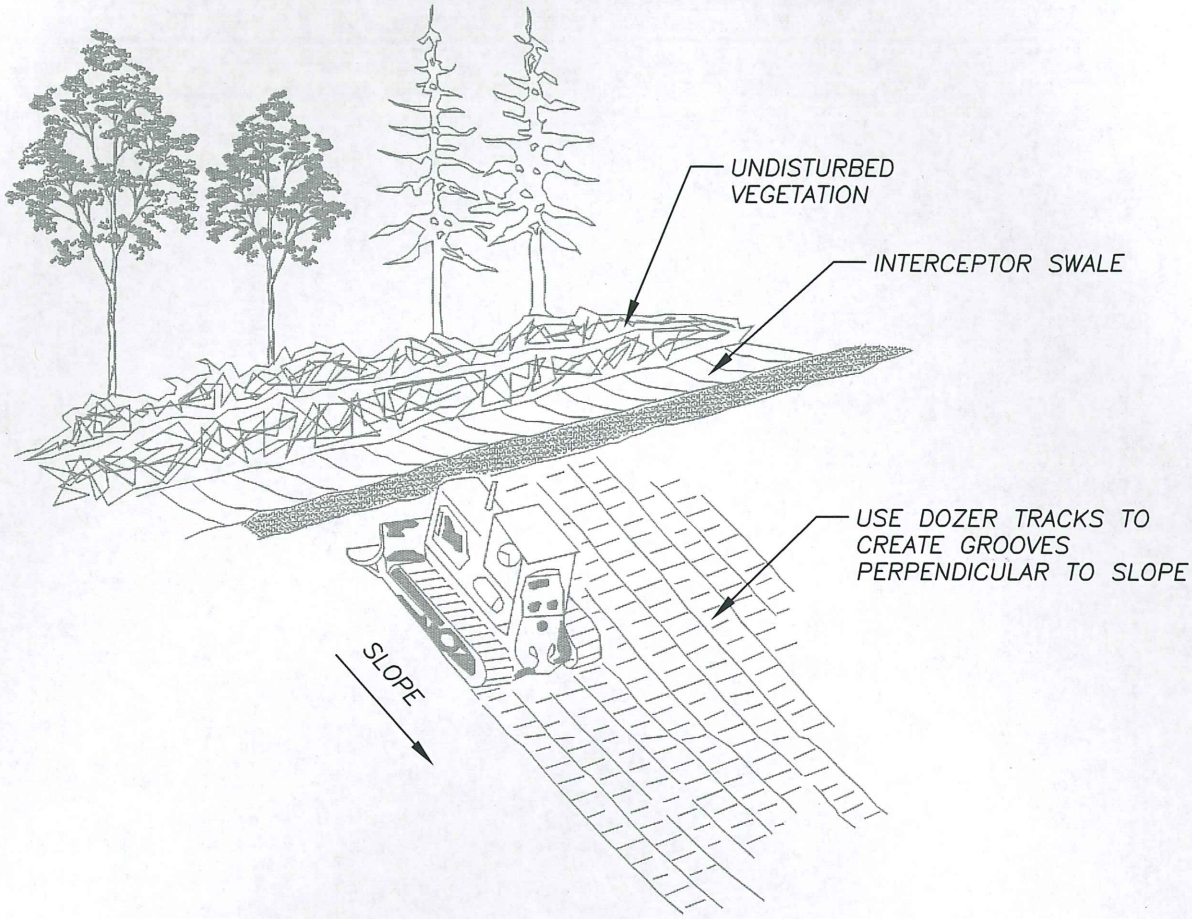


NOTES:

1. ALL SLOPES STEEPER THAN 3:1 AND GREATER THAN 5 VERTICAL FEET SHALL BE SURFACED ROUGHED.
2. AREAS WITH GRADES STEEPER THAN 3:1 SHALL BE ROUGHENED TO A DEPTH OF 2"–4" PRIOR TO SEEDING.
3. AREAS THAT WILL NOT BE STABILIZED IMMEDIATELY SHALL BE ROUGHENED TO REDUCE RUNOFF VELOCITY UNTIL SEEDING TAKES PLACES.
4. SLOPES WHERE MOWING IS PLANNED SHOULD NOT BE EXCESSIVELY ROUGHENED.
5. REFER TO BMP C130 IN VOLUME II OF THE WESTERN WASHINGTON MANUAL FOR MORE INFORMATION.

N.T.S.

| SURFACE ROUGHENING (CAT TRACKING) | | | | | STANDARD DETAIL |
|---|---|---|---|---|---|
| THE CITY OF BATTLE GROUND | CITY OF BATTLE GROUND APPROVED | REVISIONS: | DATE: | DRAWN: | DESIGNED: | EC–8.2 |
| | | 1 | 9/15/10 | RMJ | RMJ | |
| | Scott R. Sawyer 9-16-10 | | | | | |
| | CITY ENGINEER DATE | | | | | |