



RAMP LIP DETAIL

DETECTABLE WARNING PATTERN AREA COLOR SHALL BE IN COMPLIANCE WITH ADA VISUAL CONTRAST REQUIREMENTS. COLOR SHALL BE APPROVED BY THE ENGINEER PRIOR TO INSTALLATION.

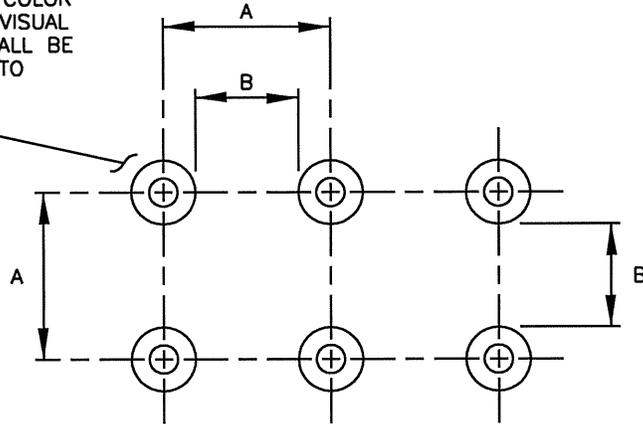

PLAN

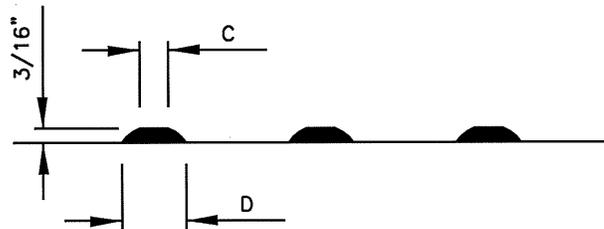

ELEVATION

	MIN.	MAX.
A	1 5/8"	2 3/8"
B	5/8"	1 1/2"
C	7/16"	3/4"
D	7/8"	1 7/16"

**NOTES:**

1. TRUNCATED DOMES SHALL BE CAST IN PLACE PLASTIC WITH THE DOME DIMENSIONS AND SPACING SHOWN. SURFACE APPLIED SYSTEMS ARE NOT ALLOWED.
2. DETECTABLE WARNINGS SHALL MATCH THE WIDTH OF THE THROAT AND BE 2' DEEP.
3. DETECTABLE WARNINGS SHALL BE INSTALLED PER MANUFACTURES RECOMMENDED PROCEDURES.
4. DETECTABLE WARNINGS SHALL BE YELLOW IN COLOR. ALTERNATE COLORS MAY BE APPROVED BY THE CITY ENGINEER.

N.T.S.

**RAMP LIP & DETECTABLE WARNING PATTERN**

PLAN #



CITY OF BATTLE GROUND  
APPROVED

*Rb*

CITY ENGINEER

6/6/08

DATE

REVISIONS:    DATE:    DRAWN:    DESIGNED:

1

6/6/08

JMH

MCH

TR-4.04