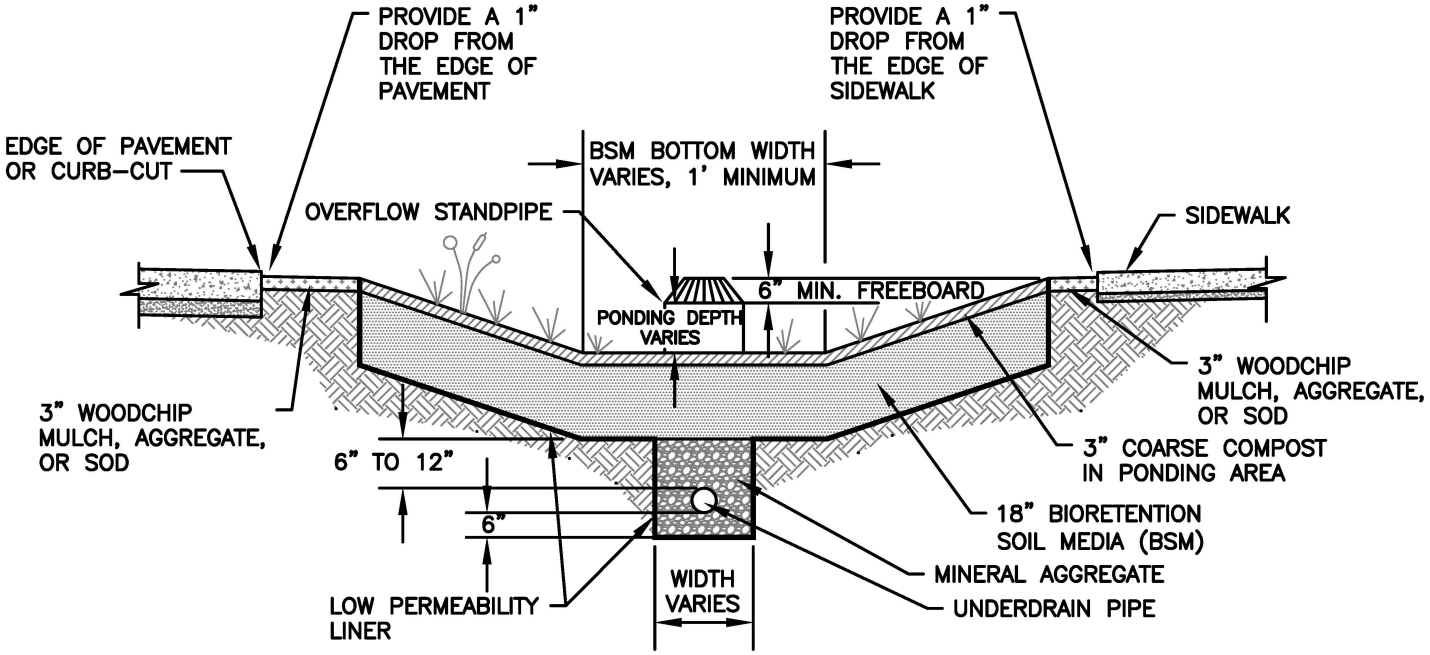


NOTES:

1. SCARIFY SUBGRADE 3" MIN. BEFORE BIORETENTION SOIL INSTALLATION.
2. COMPACT BSM TO 85% PER ASTM 1577.
3. REFER TO BMP T7.30 IN VOLUME V OF THE STORMWATER MANAGEMENT MANUAL FOR WESTERN WASHINGTON FOR MORE INFORMATION.

N.T.S.

BIORETENTION WITH LINER (NOT LID)

STANDARD DETAIL

THE CITY OF BATTLE GROUND

CITY OF BATTLE GROUND
APPROVED

Mark Henrey 06/11/2018

CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	01/23/16	KDU	KDU
2	02/16/17	CAS	KDU

ST–11.08