


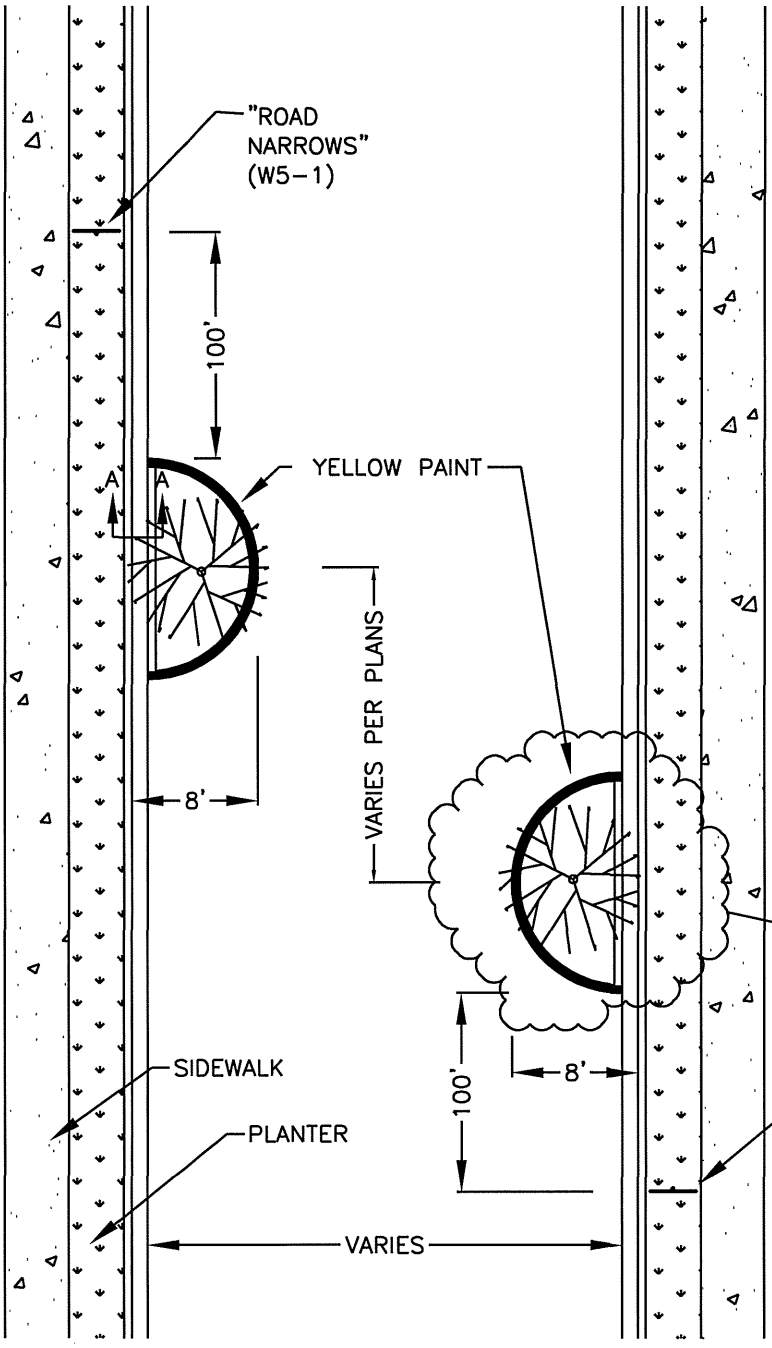


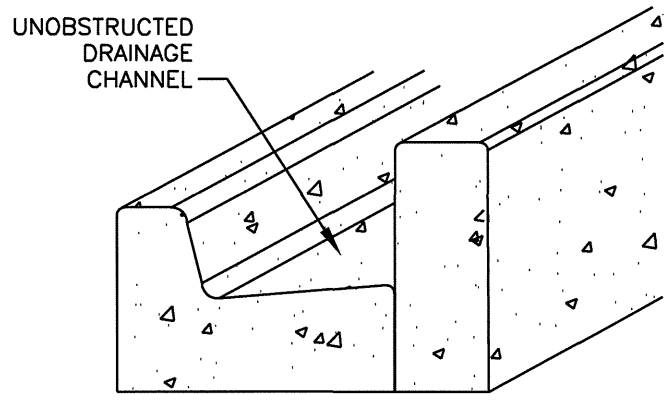

SECTION A–A
VERTICAL CURB ABUTTING CURB AND GUTTER

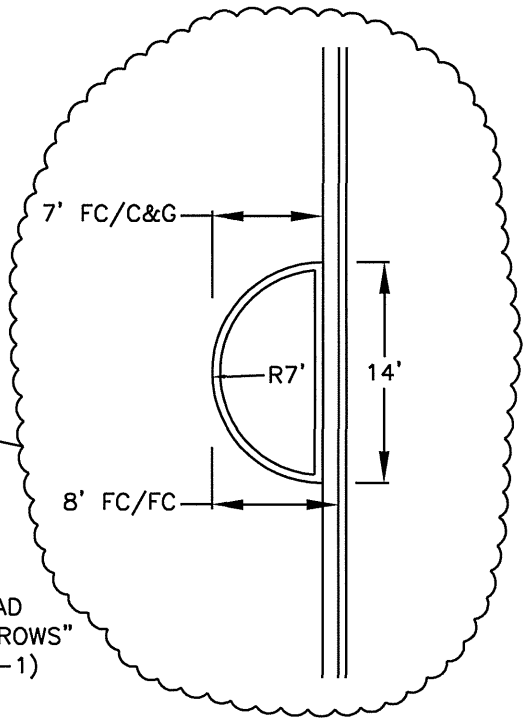

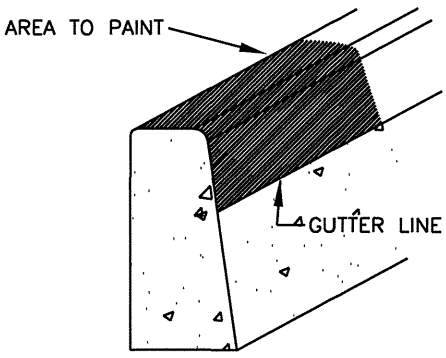

VERTICAL CURB

N.T.S.

NOTES:

1. EACH CURB EXTENSION TO HAVE ONE (1) TREE AND BE FILLED W/BARKDUST.
2. SIGNAGE PER LATEST EDITION OF THE MUTCD.
3. CURB PER DETAIL TR–3.00.
4. SIGN MOUNTING PER DETAIL TR–7.02.

CURB EXTENSIONS

PLAN #

CITY OF BATTLE GROUND
APPROVED

6/9/08

CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	3/12/08	JMH	MCH
2	6/9/08	JMH	MCH

TR–6.06