
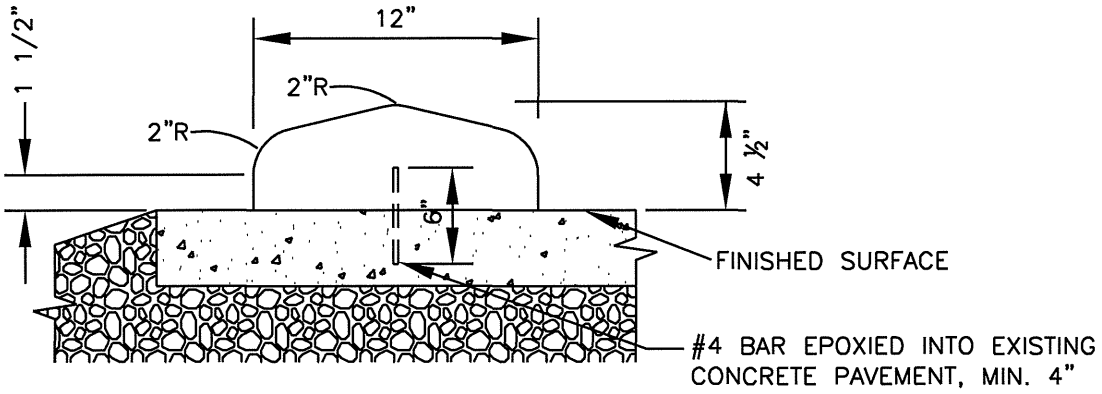


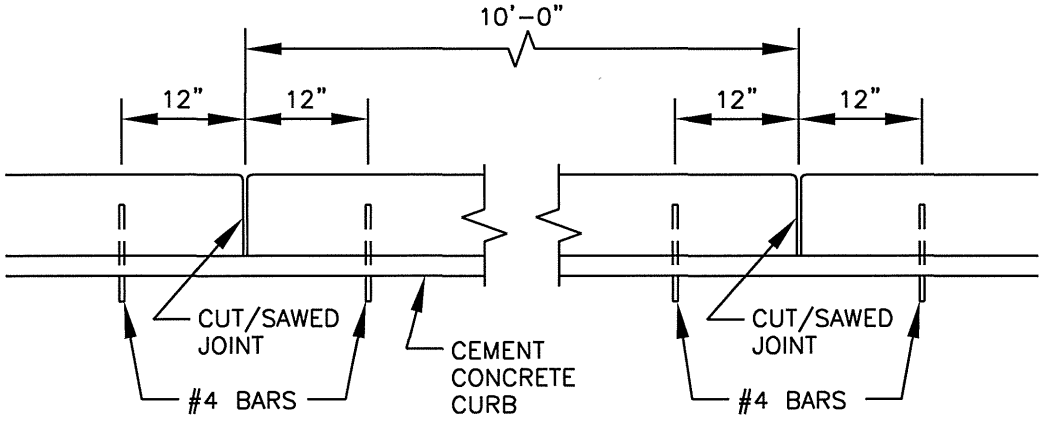

SPACING OF ANCHOR BARS

NOTES:

1. CONCRETE SHALL BE 3000 PSI MIN. MEETING WSDOT STANDARD SPECIFICATIONS 6-02.3(2)B.
2. FOR CONCRETE CURBS, 3/8" EXPANSION JOINTS SHALL BE PLACED ON BOTH SIDES OF CATCH BASINS, AT TOPS OF DRIVEWAYS, ALL CHANGES IN DIRECTION, OR AS DIRECTED BY INSPECTOR. 1½" CONTRACTION JOINTS TO BE PLACED AT 10' INTERVALS. SEE CONCRETE JOINTS DETAIL TR-5.01.
3. THE PAVEMENT SHALL BE DRY AND CLEANED OF LOOSE MATERIAL PRIOR TO PLACEMENT.
4. MAY ONLY BE USED WHEN APPROVED BY THE CITY ENGINEER.

N.T.S.

EXTRUDED CURB

PLAN #

CITY OF BATTLE GROUND
APPROVED

6/2/08

CITY ENGINEER DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:
1	9/14/07	JMH	MCH
2	1/31/08	JMH	MCH
3	6/2/08	JMH	MCH

TR-3.01